

Led Premium D-Light (I)

Replaces Traditional Fluorescent Fixtures



Features

- ✓ Double Led Strip Design
- ✓ More Flatter And Slimmer
- ✓ Greater Light Angle (>180° Beam)




■ Connection Ways



■ Standard Clip




... Product Line Drawing (Size:mm)

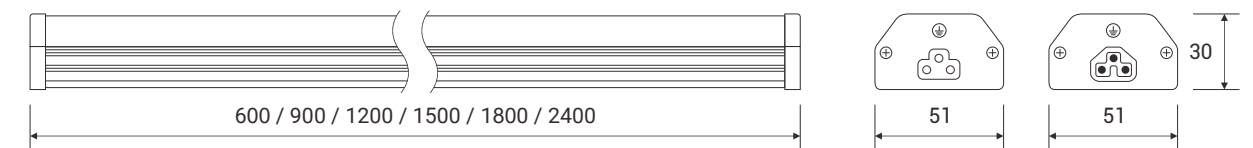


... Wiring Method

Single Wired



Linkable



... Product Specification

Material : AL+PC	Input Voltage : AC100-277V	CCT : <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K
------------------	----------------------------	---

Model	Size	Power	PC Cover	Lumens (lm) ±10%	Package
LED-T5DL2-15W	2ft	15W	Frosted	1650	735*235*190 (mm) 20pcs/ctn
LED-T5DL3-25W	3ft	25W	Frosted	2750	1045*235*190 (mm) 20pcs/ctn
LED-T5DL4-30W	4ft	30W	Frosted	3300	1345*235*190 (mm) 20pcs/ctn
LED-T5DL4-40W	4ft	40W	Frosted	4400	1345*235*190 (mm) 20pcs/ctn
LED-T5DL5-40W	5ft	40W	Frosted	4400	1645*235*155 (mm) 16pcs/ctn
LED-T5DL6-44W	6ft	44W	Frosted	4840	1910*235*155 (mm) 16pcs/ctn
LED-T5DL8-60W	8ft	60W	Frosted	6600	2520*180*120 (mm) 9pcs/ctn

... Applications: Warehouses, Factories, Food, Storage, Hangar, Shopping malls, Hotel, Garage, etc